



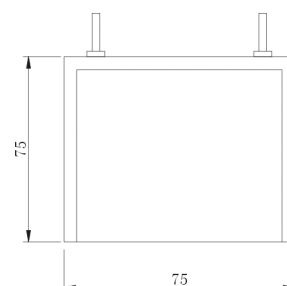

Thin cell Primary lithium batteries Cf107575


3.0V primary lithium-manganese dioxide Li-MnO₂ power type Spiral cell

Nominal capacity (at 1mA 2.0V cut off, the capacity restricted by the cell varies according to current drain, temperature and cut off).	700mAh
Open circuit voltage	3.0V
Nominal voltage	3.0V
Max. continuous current	100mA
Max. pulse current	200mA
Weight	9.0g
Thickness(max)	1mm
Width(max)	75mm
Length(max)	75mm
Operating temperature range	-40~+60°C



Unit:mm

Typical 1mA, 100mA Discharge current

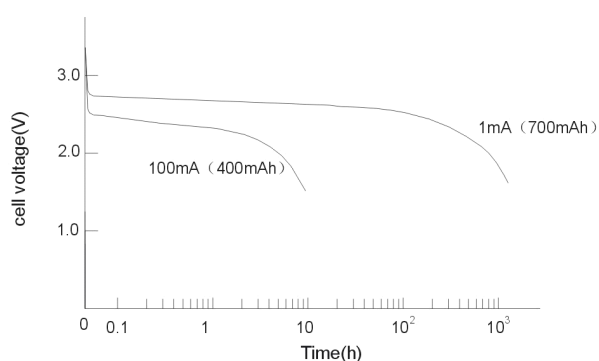

Low temperature performance
(At 0°C and 23±2°C @ 1mA discharge current)

