

## 1. Application range

Lithium Manganese Dioxide cell battery, Model CR34615SE  
Manufacturer: Wuhan HCB Battery Technology Co.,Ltd.


## 2. Objective

To regulate the performance index and test method of CR34615SE, as well as guidelines and warnings.

## 3. Technical parameter

- 3.1 Model: CR34615SE
- 3.2 Nominal voltage: 3.0V
- 3.3 Norminal capacity: 1400mAh (Continuous discharging at 2mA until 2.0V end-voltage at 23±2°C)
- 3.4 Max. constant current: 80mA
- 3.5 Max. pulse current: 200mA
- 3.6 Operating temperature range: -40°C ~ +80°C
- 3.7 Nominal weight: 135.0g
- 3.8 Max. Outer dimensions: as drawing.
- 3.9 Structures: Manganese dioxide cathode、 lithium anode、 organic electrolyte、 polypropylene separator and steel battery can and cap.
- 3.10 Self-discharging rate: ≤1% per year.

#### 4. Discharge curve

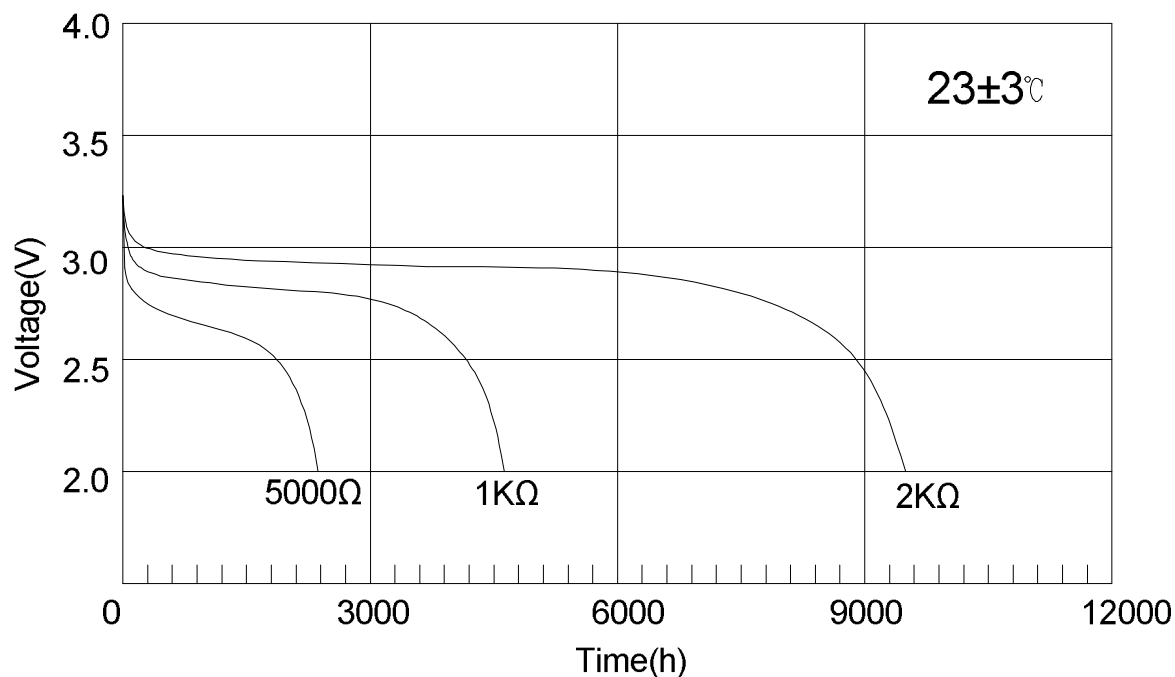

#### 5. International attestation



ISO-16628

EU 02  
031073 01

MH10060

RoHS

No.03007

#### 6. Application

Radio communication transmitter-receiver, underwater weapons, medical instruments, RFID active tag/card, automatic sanitaryware, intelligent IC card, PC computer RAM, CMOS memory backup powersupply, portable communication equipment, time counter, number counter and so on.