

## 1. Application range

Lithium Manganese Dioxide cell battery, Model 2CR5  
Manufacturer: Wuhan HCB Battery Technology Co.,Ltd.



## 2. Objective

To regulate the performance index and test method of 2CR5, as well as guidelines and warnings.

## 3. Technical parameter

- 3.1 Model: 2CR5
- 3.2 Nominal voltage: 6.0V
- 3.3 Nominal capacity: 1500mAh (Continuous discharging at 1mA until 2.0V end-voltage at 23±2°C)
- 3.4 Max. constant current: 1500mA
- 3.5 Max. pulse current: 3000mA
- 3.6 Operating temperature range: -40°C ~ +80°C
- 3.7 Nominal weight: 43.0g
- 3.8 Max. Outer dimensions: as drawing.
- 3.9 Structures: Manganese dioxide cathode、 lithium anode、 organic electrolyte、 polypropylene separator and steel battery can and cap.
- 3.10 Self-discharging rate: ≤1% per year.

#### 4. Discharge curve

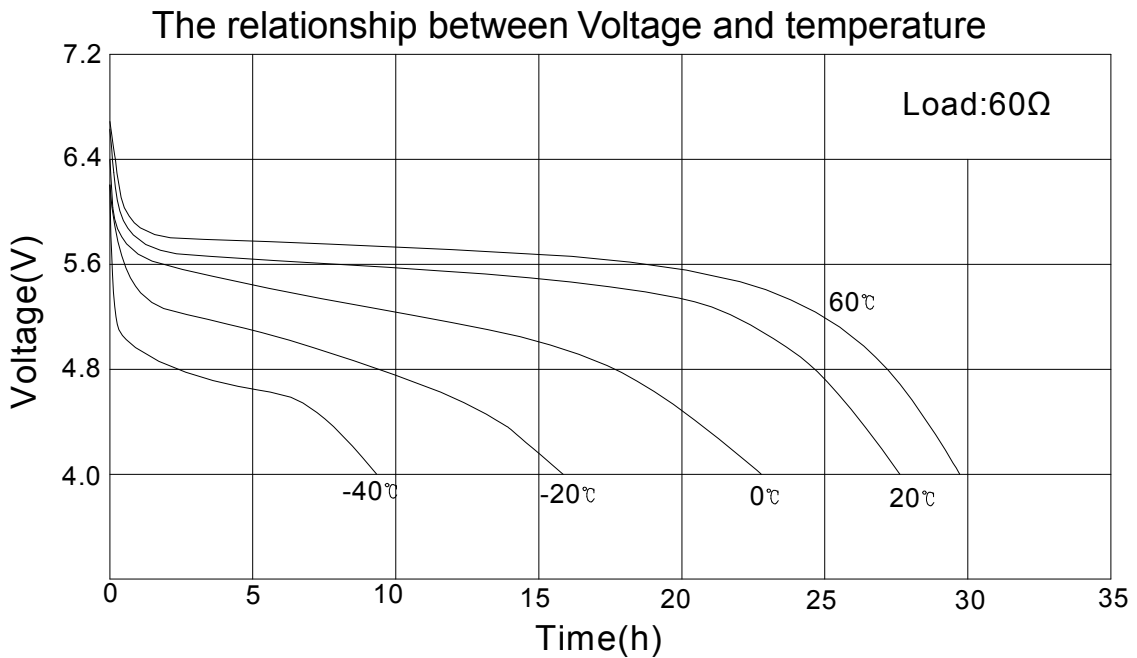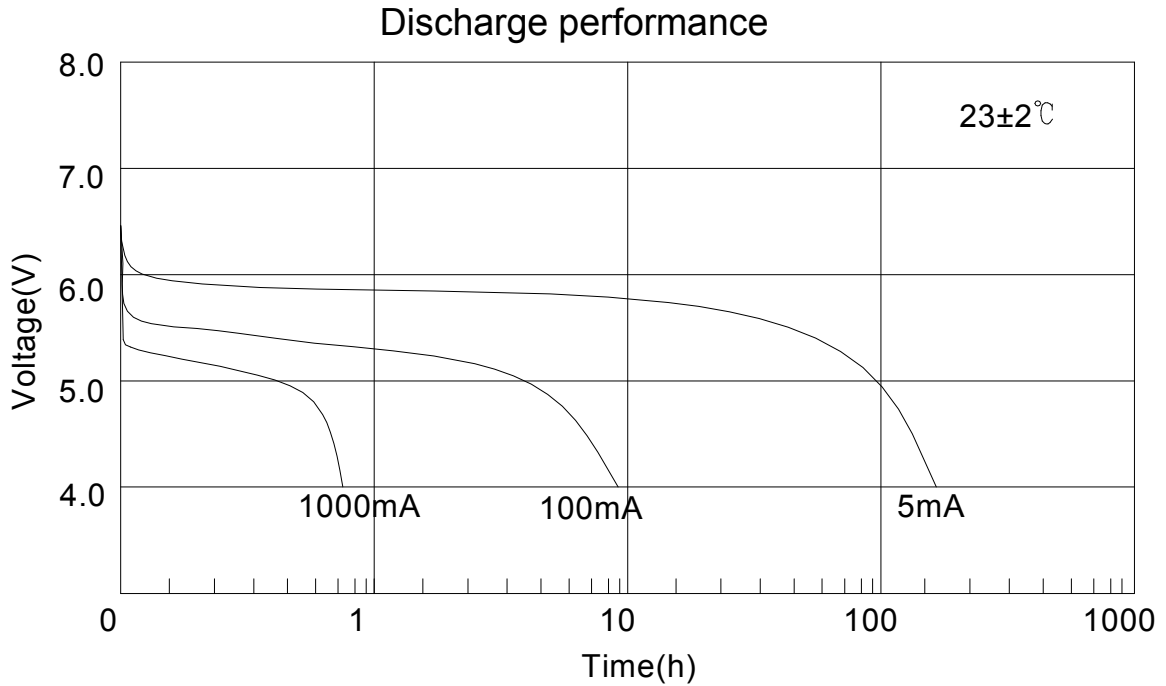

## 5. International attestation

**ISO-16628****031073 01****MH10060****RoHS****No.03007**

## 6. Application

Radio communication transmitter-receiver, underwater weapons, medical instruments,RFID active tag/card, automatic sanitaryware, intelligent IC card, PC computer RAM,CMOS memory backup powersupply, portable communication equipment,time counter, number counter and so on.