

1. Application range

Lithium Manganese Dioxide cell battery, Model CR14335SE
Manufacturer: Wuhan HCB Battery Technology Co.,Ltd.


2. Objective

To regulate the performance index and test method of CR14335SE, as well as guidelines and warnings.

3. Technical parameter

- 3.1 Model: CR14335SE
- 3.2 Nominal voltage: 3.0V
- 3.3 Nominal capacity: 1100mAh (Continuous discharging at 0.5mA until 2.0V end-voltage at $23\pm 2^{\circ}\text{C}$)
- 3.4 Max. constant current: 8mA
- 3.5 Max. pulse current: 80mA
- 3.6 Operating temperature range: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 3.7 Nominal weight: 16.0g
- 3.8 Max. Outer dimensions: as drawing.
- 3.9 Structures: Manganese dioxide cathode、 lithium anode、 organic electrolyte、 polypropylene separator and steel battery can and cap.
- 3.10 Self-discharging rate: $\leq 1\%$ per year.

4. Discharge curve

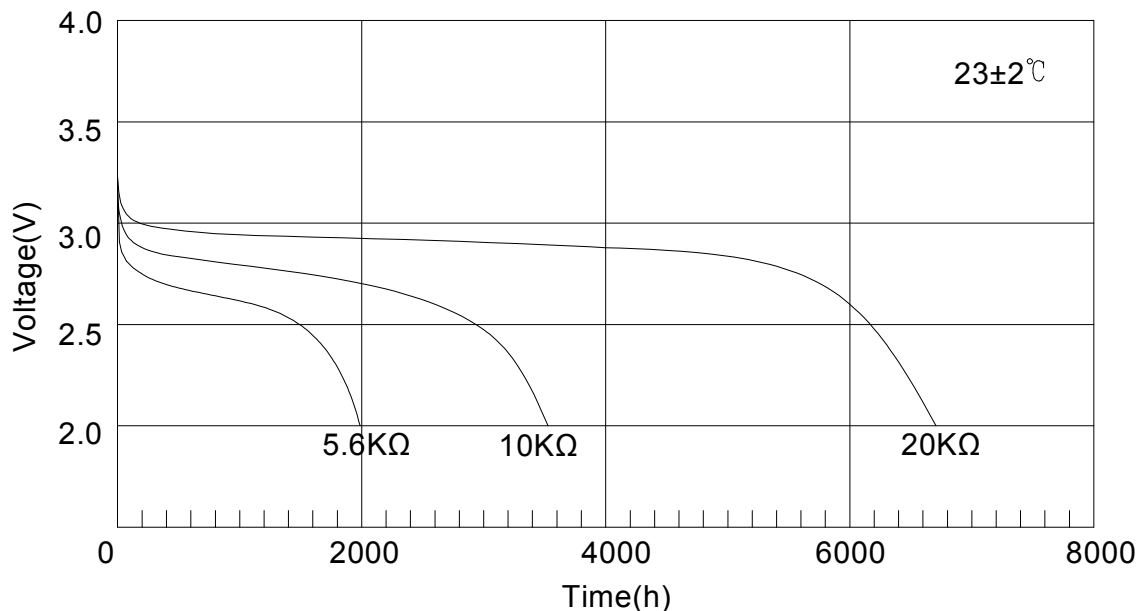

5. International attestation



ISO-16628

EU 02
031073 01

MH10060

RoHS

No.03007

6. Application

Radio communication transmitter-receiver, underwater weapons, medical instruments, RFID active tag/card, automatic sanitaryware, intelligent IC card, PC computer RAM, CMOS memory backup powersupply, portable communication equipment, time counter, number counter and so on.