



Technical Specification



The picture are just for your reference.
 Please be subject to the actual products.



1、 Application range

Lithium Manganese Dioxide Thin Cell battery, Model CR9V
 Manufacturer: Wuhan Haocheng Energy Resources Technology Co.,Ltd.


2、 Objective

To regulate the performance index and test method of CR9V, as well as guidelines and warnings.

3、 Technical parameter

- 3.1 Model: CR9V
- 3.2 Nominal voltage: 9.0V
- 3.3 Nominal capacity: 1200mAh(Continuously discharged under 1mA current till 2.0V end-voltage at the temperature of 23℃±3℃)
- 3.4 Max. constant current: 400mA
- 3.5 Max. pulse current: 800mA
- 3.6 Operating temperature range: -40℃~+60℃
- 3.7 Nominal weight: 30g.
- 3.8 Max. Outer dimensions: as drawing.
- 3.9 Structures: Manganese dioxide cathode 、 lithium anode 、 organic electrolyte 、 polypropylene、 separator and steel battery can and cap.
- 3.10 Self-discharging rate: ≤2% per year.

4、Constant-current discharge performance

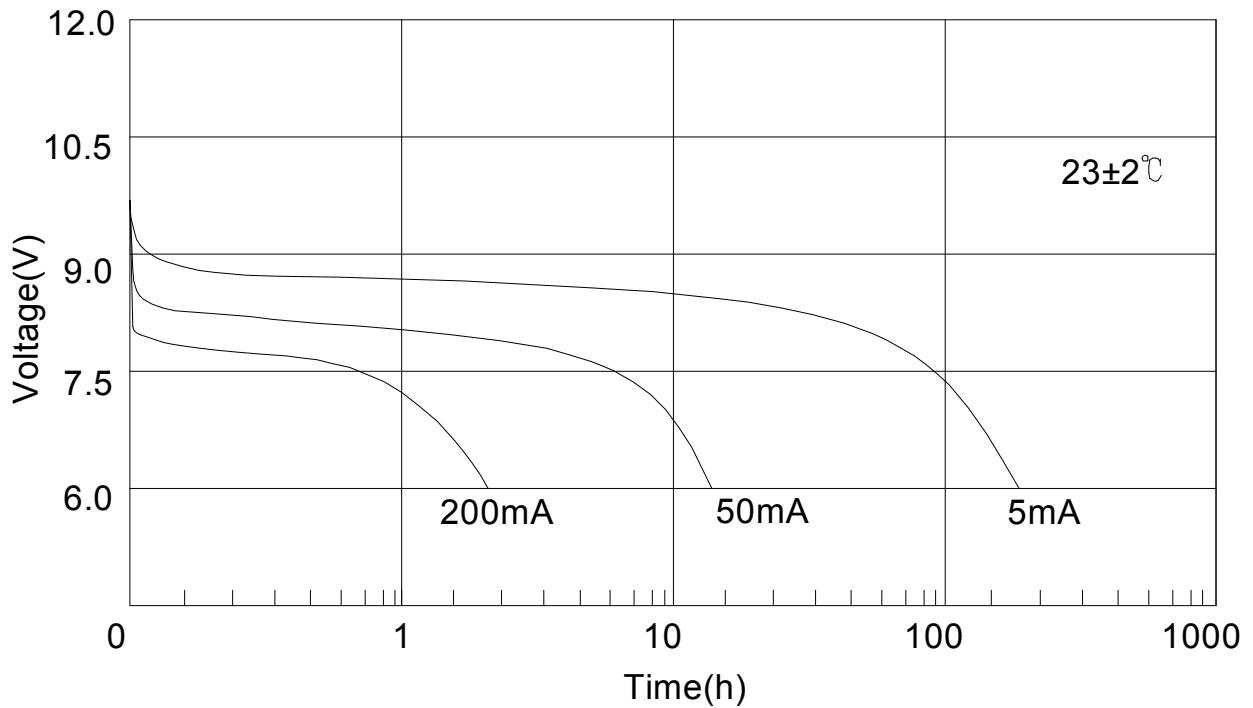

5、Certification



ISO-16628



EU 02
031073 01



MH10060

RoHS

No.03007