

## 1. Application range

Lithium Thionyl Chloride Battery, Model EF651615  
Manufacturer: HCB Battery Co.,Ltd.

## 2. Objective


To regulate the performance index and test method of EF651615, as well as guidelines and warnings.

## 3. Technical parameter


- 3.1 Model: EF651615
- 3.2 Nominal voltage: 3.6V
- 3.3 Norminal capacity: 400mAh (Continuous discharging at 0.5mA until 2.0V end-voltage at 23±2°C)
- 3.4 Max. constant current: 5mA
- 3.5 Max. pulse current: 20mA
- 3.6 Operating temperature range: -40°C ~ +60°C
- 3.7 Nominal weight: 5.0g
- 3.8 Max. Outer dimensions: as drawing.
- 3.9 Self-discharging rate: ≤1% per year.

4. Discharge curve

Discharge performance

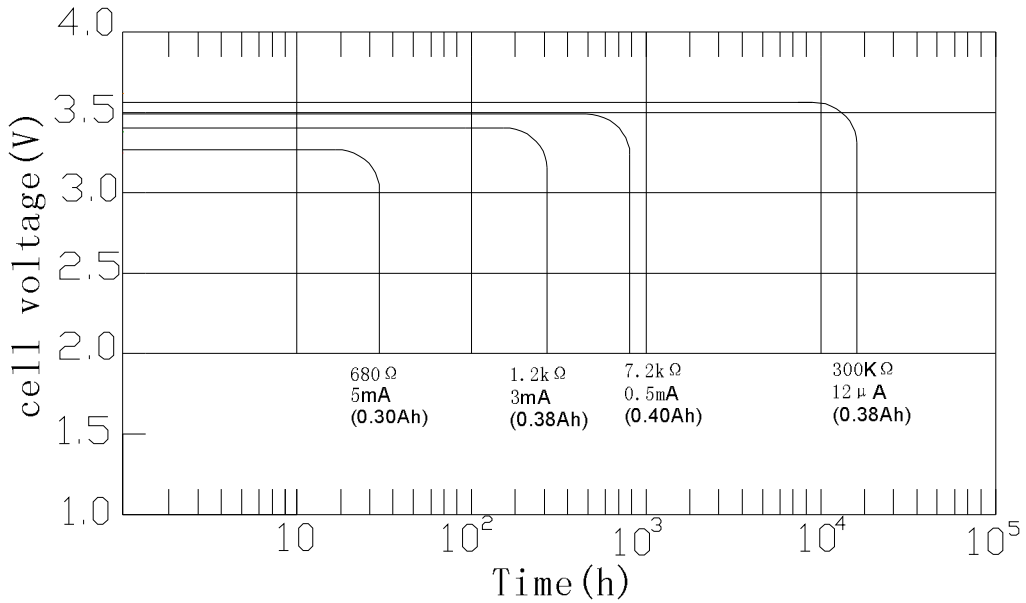

The relationship between Voltage and temperature

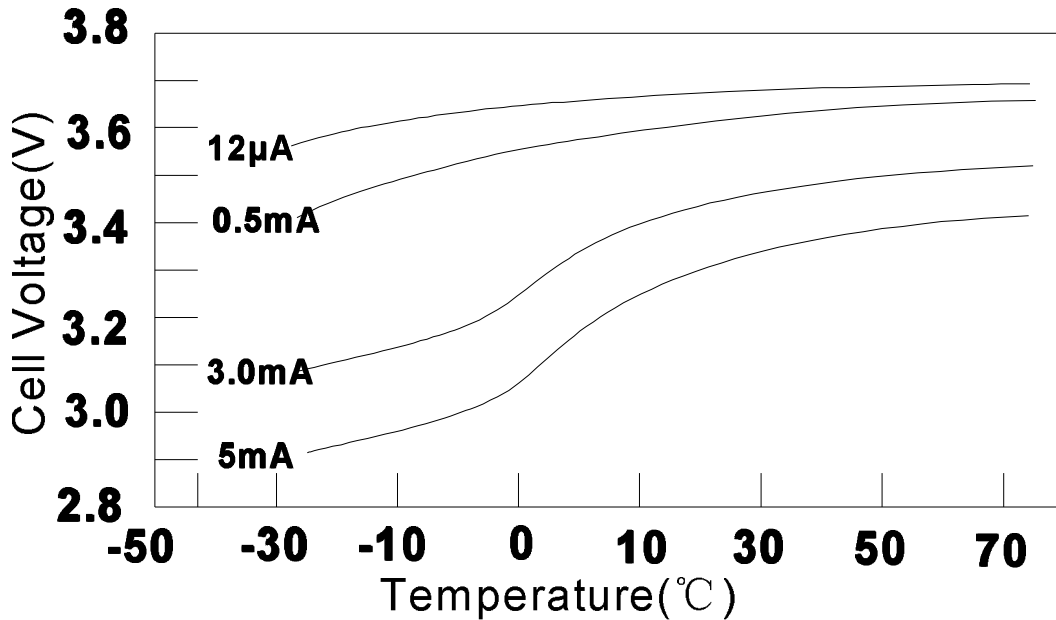

## 5. International attestation

**ISO-16628****EU 02  
031073 01****MH10060****RoHS****No.03007**

## 6. Application

Radio communication transmitter-receiver, underwater weapons, medical instruments,RFID active tag/card, automatic sanitaryware, intelligent IC card, PC computer RAM,CMOS memory backup powersupply, portable communication equipment,time counter, number counter and so on.