

1. Application range

Lithium Manganese Dioxide cell battery, Model CR14250SE
Manufacturer: Wuhan HCB Battery Technology Co.,Ltd.


2. Objective

To regulate the performance index and test method of CR14250SE, as well as guidelines and warnings.

3. Technical parameter

- 3.1 Model: CR14250SE
- 3.2 Nominal voltage: 3.0V
- 3.3 Norminal capacity:900mAh (Continuous discharging at 0.5mA untill 2.0V end-voltage at 23±2℃)
- 3.4 Max. constant current: 7mA
- 3.5 Max. pulse current: 70mA
- 3.6 Operating temperature range: -40℃~+85℃
- 3.7 Nominal weight: 11.0g
- 3.8 Max. Outer dimensions: as drawing.
- 3.9 Structures: Manganese dioxide cathode、 lithium anode、 organic electrolyte、 polypropylene separator and steel battery can and cap.
- 3.10 Self-discharging rate: ≤2% per year.

4. Discharge curve

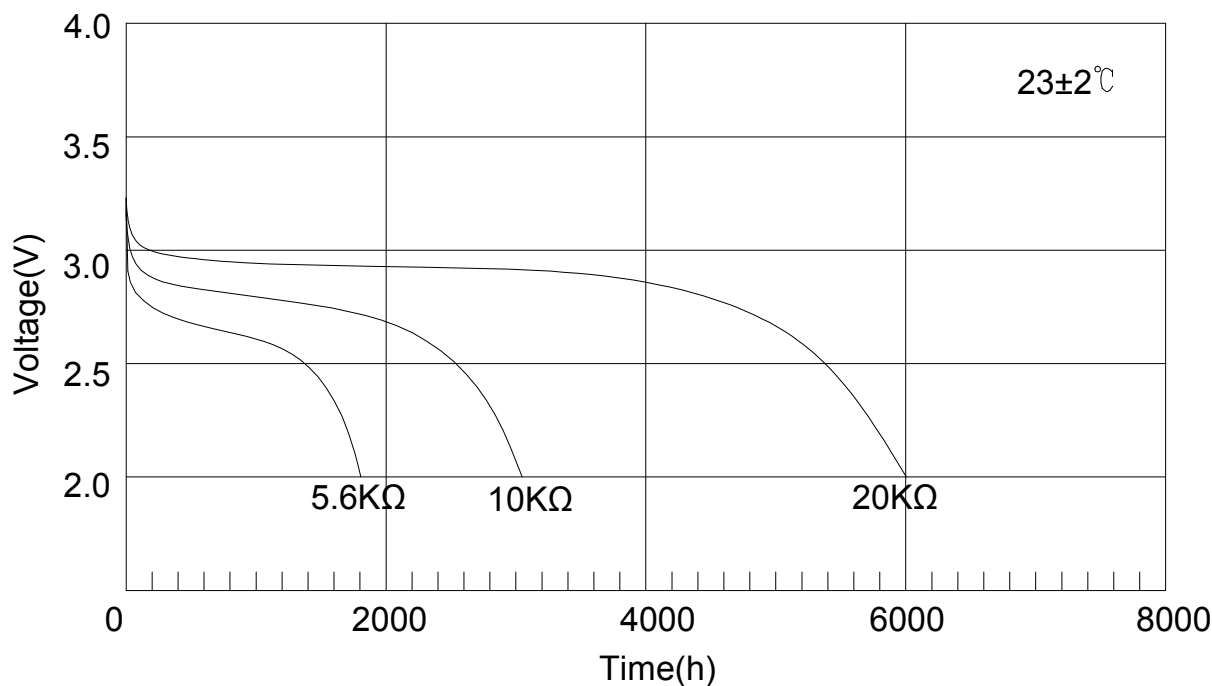

4. International attestation



ISO-16628

EU 02
031073 01

MH10060

RoHS

No.03007

5. Application

Radio communication transmitter-receiver, underwater weapons, medical instruments, RFID active tag/card, automatic sanitaryware, intelligent IC card, PC computer RAM, CMOS memory backup powersupply, portable communication equipment, time counter, number counter and so on.