



Technical Specification

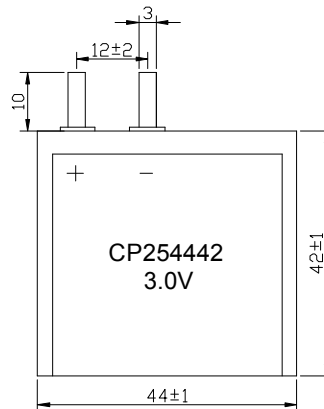

The picture are just for your reference.
 Please be subject to the actual products.

1、Application range

Lithium Manganese Dioxide Thin Cell battery, Model CP254442
 Manufacturer: Wuhan Haocheng Energy Resources Technology Co.,Ltd.

2、Objective


To regulate the performance index and test method of CP254442, as well as guidelines and warnings.

3、Technical parameter


- 3.1 Model: CP254442
- 3.2 Nominal voltage: 3.0V
- 3.3 Nominal capacity : 750mAh(Continuously discharged under 1mA current till 2.0V end-voltage at the temperature of 23℃±3℃)
- 3.4 Max. constant current:300mA
- 3.5 Max. pulse current: 500mA
- 3.6 Operating temperature range: -40℃~+60℃
- 3.7 Nominal weight: 6.5g.
- 3.8 Max. Outer dimensions: as drawing.
- 3.9 Structures: Manganese dioxide cathode 、 lithium anode 、 organic electrolyte 、 polypropylene 、 separator and steel battery can and cap.
- 3.10 Self-discharging rate: ≤2% per year.

4、Dishcharge performance

4.1 Constant-current discharge

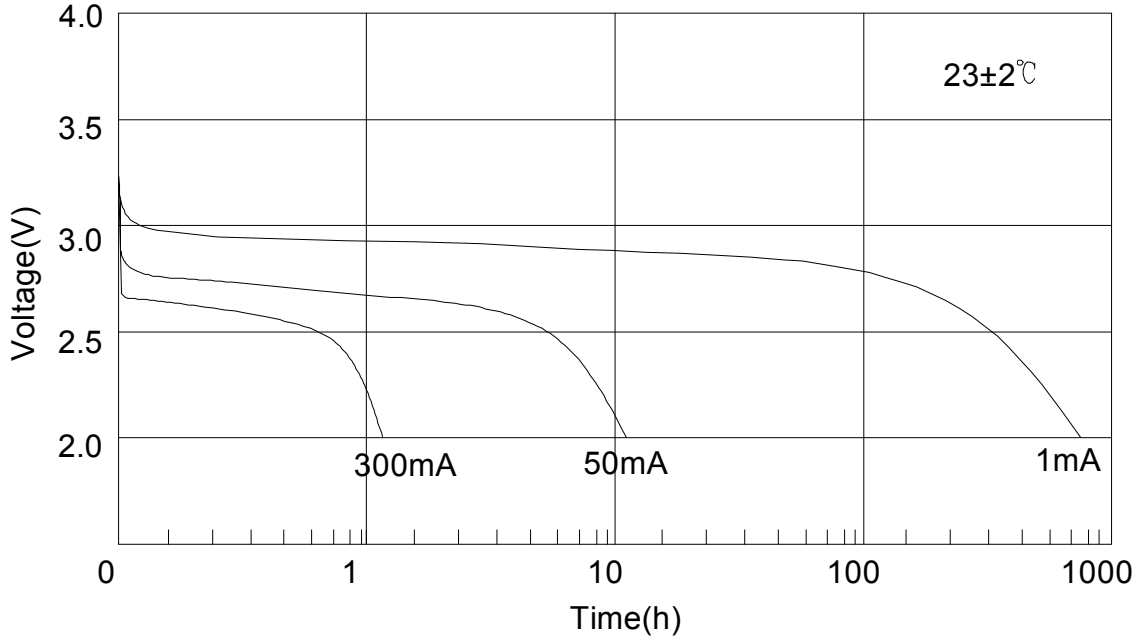

4.2 Constant resistance discharge at different temperatures

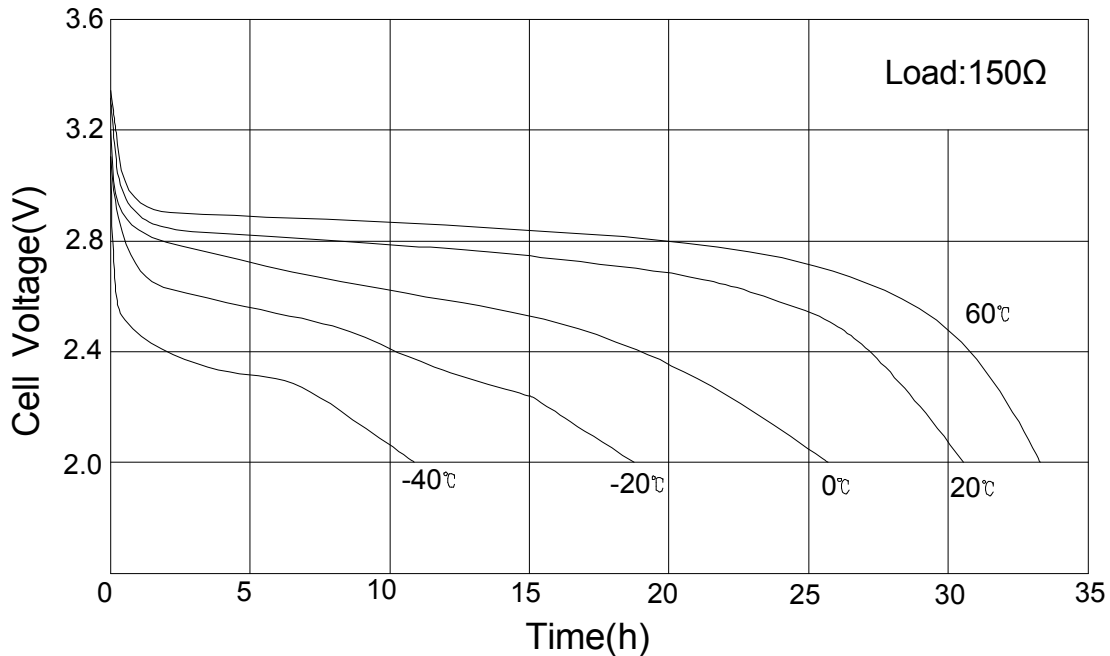

5、Certification



ISO-16628



**EU 02
031073 01**



MH10060

RoHS

No.03007